



*Pictures are for illustration purposes only.
*Products may vary in appearance.

GENERATOR

Prime power: kVA/kW	200/160	Base fuel tank running: hrs	24
Standby power: kVA/kW	220/176	Fuel tank capacity: L	1330
Phase	3	Structure Type	R
Voltage: V	415	Dry weight: Kg	2959
Ampage: A	278	Dimensions: LxWxH	3592 x 1322 x 2152

ENGINE

Brand	Cummins	Intake system	Turbocharged
Model	6CTAA8.3-G2	Injection type	Direct
Cylinders	6	Cooling system	Water cooled
Displacement: L	8.3	Battery: V	12/24
Bore: mm	114	Fuel tank capacity: L	1330
Stroke: mm	135	Coolant capacity: L	45.3
Compression ratio	N/A	Oil capacity: L	18.9
Rated rpm	1500	Air filter	Dry
Engine governor	Electrical S6700E	Noise level @ 7m: dBA	76.48
Standby power: kW	203	Fuel consumption:	---
Prime power: kW	183	50% Load: L/H	23.3
		100% Load: L/H	45.4

ALTERNATOR


Brand	Stamford	Voltage: V	415
Model	UCI274H	Ampage: A	278
Exciter	Brushless	Frequency: Hz	50
Terminals	12	Phase	3
Drip proof	IP23	A.V.R model	MX341
Overspeed: rpm	2250		

KEY FEATURES

- ABB main circuit breaker: 320 A
- Emergency stop switch
- ATS (automatic transfer switch) receptacle
- Lockable battery isolator switch
- All access/control panel doors lockable
- Heavy duty powder coated canopy
- Drain points for fuel/radiator/engine/base
- Remote run connector
- Deep Sea Electronics: DSE- 7420
- 2x 12V/120AH sealed for life maintenance free battery
- Sound attenuated enclosure
- Vibration isolators between engine/ alternator/base
- Steel base frame with forklifts/drag slots
- Single or dual pick-up centre hitch point
- Analog and digital fuel gauges
- 50°C radiator
- Oil pump on the engine
- Base fuel tank for 24 hrs running
- Breather valve for fuel tank
- Operations manual/specifications



Enclosed power outlet, terminal and sockets



Superior engine



Control switch for easy maintenance




Radiator protection cover



Forklift channel



Deep Sea controller



Double-layer fuel tank



Fuel inlet

*Pictures are for illustration purposes only.
*Products may vary in appearance.

ENVIRONMENTAL OPERATING CONDITIONS

- Installation place: Outdoors or indoors (well ventilated).
- Ambient temperature: -25°C to 50°C. The coolant heater is needed when the temperature is below 5°C.
- Humidity: Less 90%.
- Altitude: Below one thousand (1000) meters above sea level.

MOTIVE GROUP CAPABILITIES INCLUDE

- Service
- Project Consultations
- Hybrid Micro Grids
- Repairs
- Earthworks
- CNG (Compressed Natural Gas)
- PLC Management
- Civil Construction
- LPG (Liquefied Petroleum Gas)
- Fabrication
- Engineering services
 - Electrical
 - Mechanical
 - Civil
- Cogeneration/CHP
- Installations
- Commissioning



Field Service Maintenance | Power Systems

Sales. Service.

E. sales@motivegroup.com.au

T. (03) 9037 4328

W. motivegroup.com.au






DESIGN STANDARDS


The designs and the productions are in conformity with:

- Conformance Européenne (CE)
 - China Compulsary Certification (CCC)
 - ISO8528-5:2005
- GB/T2820.5-2009
 - AS 3000-2018
 - AS 3010.1-2017

Dry weight	2959 KG
Fuel tank capacity	1330 L
Dimensions L x W x H	3592 x 1322 x 2152

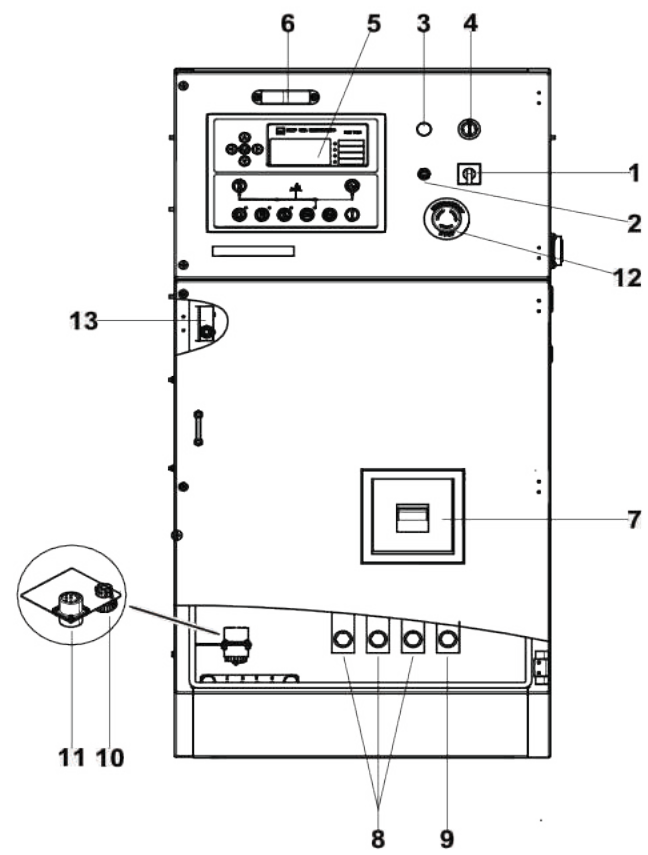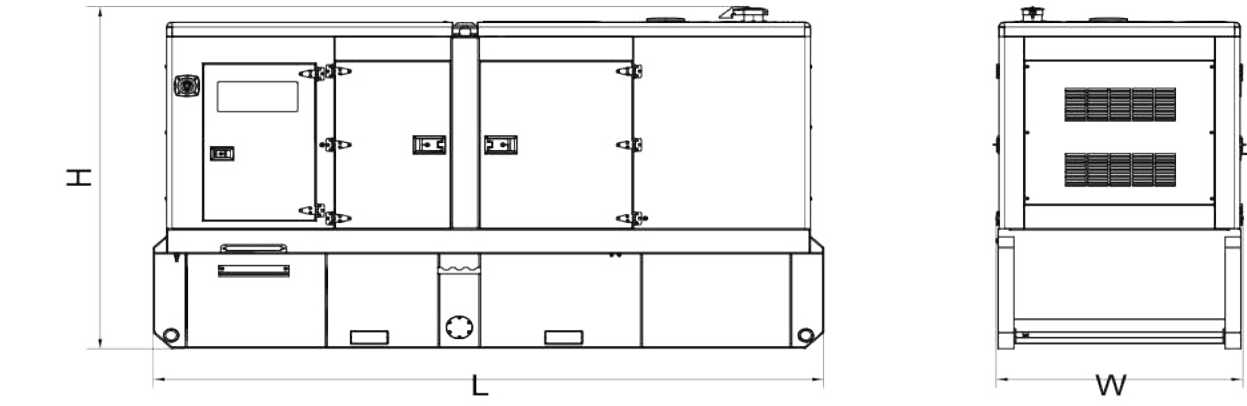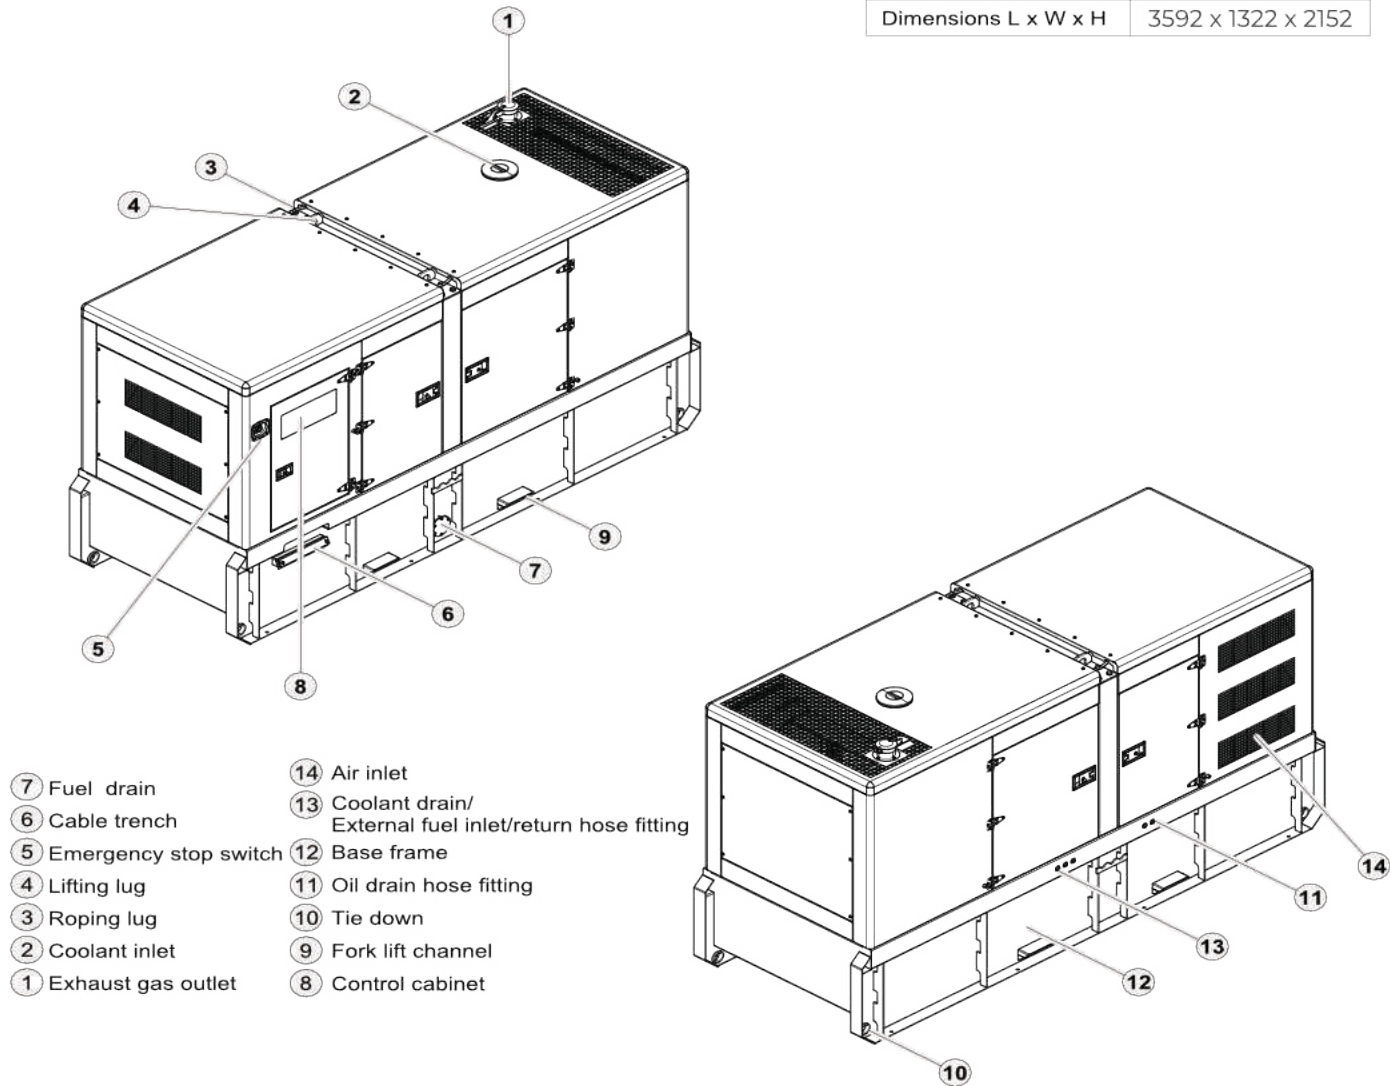

Control & Field wiring cabinet

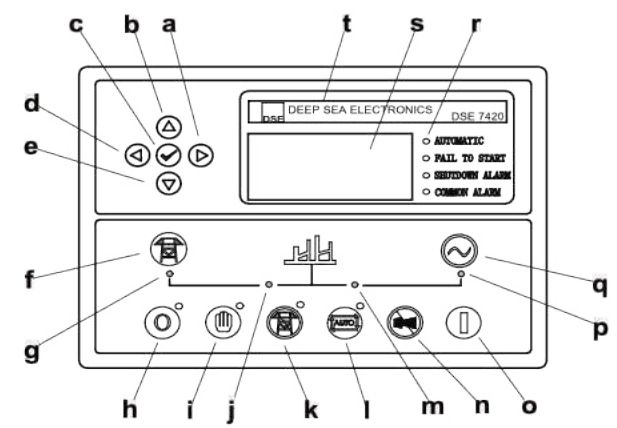

Control module

Ref.	Description
1	Mains input changeover switch
2	Control cabinet lamp switch
3	Charge indicator
4	Key switch
5	Control module
6	Control cabinet lamp
7	Main circuit breaker
8	Live wire terminals
9	Neutral wire terminal
10	Mains input/Remote control communication connector
11	Mains input/Remote control/ ATS communication connector
12	Emergency stop switch
13	Limit switch

a	Button (next page)
b	Button (increase value / previous item)
c	Button (accept)
d	Button (previous page)
e	Button (decrease value / next item)
f	Button (transfer the load to the mains supply, when in Manual mode only)
g	Mains supply available LED
h	Stop / Reset button
i	Manual button (Manual control mode)
j	Mains supply on load LED
k	Test button (Test mode)
l	Auto button (Auto mode)
m	Genset on load LED
n	Mute/Lamp test button
o	Start button (Manual)
p	Genset available LED
q	Button (transfer the load to the genset, when in Manual mode only)
r	Alarm LED (4 alarm items)
s	LCD display
t	Control module name

Standby rating: These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. Overload will not be permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3). Prime rating: These ratings are applicable for supplying continuous electrical power (at variable load) instead of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1-12hours. Standard Reference Conditions: Standard reference conditions 25°C(77°F) air inlet temp, 100m (328ft) A.S.L 30% relative humidity. Fuel consumption data at full load with diesel fuel, with specific gravity of .85 and conforming to BS2869-1998, Class A2. Note kVA ratings subject to ambient temperature/altitude/site conditions. Engine kW rating may vary +/- 3%. Designed to comply with Australian and European Standards. All of Motive Group Pty Ltd's diesel generators come with a standard 12month/2000hr manufacturers warranty. *T&C's apply.

